
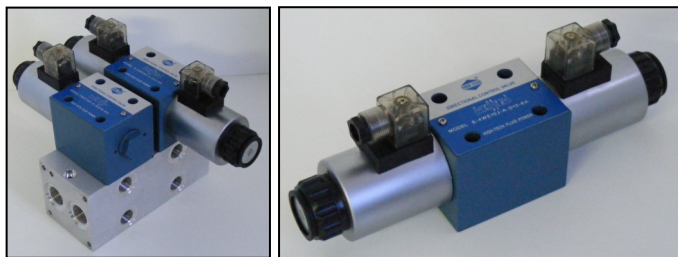


CETOP 5 NG6 SOLENOID VALVES

The Hyteco range of High-Tech Cetop 5 Solenoid Valves are manufactured to the ISO 9001 International Quality Management system. They offer very good value, as a lower cost alternative to the more expensive brands, and function equally well in a wide range of industry applications.

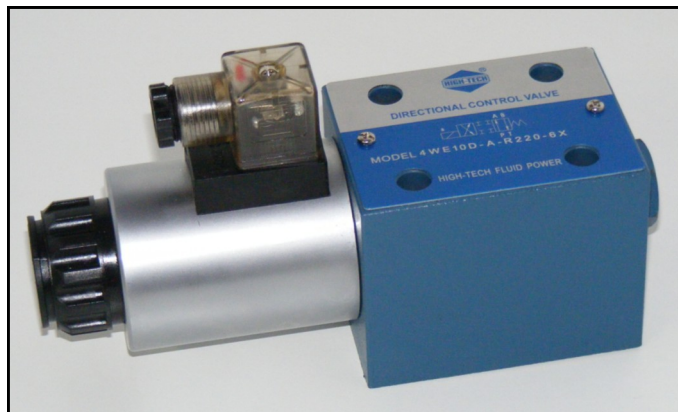

Features:

- Maximum Pressure rated to 350 Bar
- Maximum Pressure on T-Port 210 Bar
- Maximum Flow up to 120 LPM
- Available in 12 & 24VDC / 110 & 220VAC
- All common spool configurations available

Benefits:

- Economical option over expensive brands
- Ideal for high pressure applications to 350 Bar
- Able to handle series circuits to 210 bar back pressure

Valve Symbol	Configuration	Part Number	Maximum Pressure In P, A & B	KG	Nominal Flow for Switching @200 Bar Nominal
	2 Position Open Centre	4WE10HA-A-(voltage)-6X	350 bar	4.8	100 LPM
	2 Position Cross Over	4WE10D-A-(voltage)-6X	350 bar	4.48	120 LPM
	3 Position All Ports Closed	4WE10E-A-(voltage)-6X	350 bar	6.15	120 LPM
	3 Position P Closed A & B to T	4WE10J-A-(voltage)-6X	350 bar	6.15	115 LPM
	3 Position All Ports Open	4WE10H-A-(voltage)-6X	350 bar	6.15	100 LPM
	3 Position P to T, A, B Closed	4WE10G-A-(voltage)-6X	350 bar	6.15	75 LPM

***Note:** Substitute (voltage) with coil voltage required: D12=12VDC, D24=24VDC, R110=110VAC, R220=220VAC
Note: Other spools available on request.
Note: LED DIN plugs and Standard Bolt Kit included.



More info? Visit our website www.hyteco.com.au to see our complete range of products.

Hyteco (Aust) Pty Ltd
 59 Kremzow Rd Brendale Qld 4500
phone: 07 3881 3312 **fax:** 07 3881 3314
email: sales@hyteco.com.au **web:** www.hyteco.com.au

We can also design and supply custom manifolds for any application required.