

HYTECO QUICK HITCH VALVES

The Hyteco range of Quick Hitch Valves are designed to be easily installed into new or existing quick hitch systems on most earthmoving machinery, such as excavators, front end loaders, skid steer loaders, etc.

Three standard models are available, as outlined below, and all are rated at 350 bar. Other styles and configurations are available on request.

LQHPS - Quick Hitch Valve



The LQHPS is very compact and ideal for controlling quick hitches where the hitch actuator is rated to the full high system pressure, up to 350 bar.

Specifications

Max pressure:	350 bar
Max flow:	15 l/min
Voltage:	12 or 24 Vdc
Porting:	All ports G1/4
Material:	Steel / ductile iron, plated

LQRPS - Quick Hitch Valve with pressure limiter




The LQRPS is ideal for controlling quick hitches where high system pressure may exceed the pressure rating of the hitch actuator. In this valve an adjustable pressure reducing/relieving valve is incorporated to limit the pressure acting on the hitch actuator.

Specifications

Max pressure:	350 bar, Red/Relieving 50-315 bar
Max flow:	15 l/min
Voltage:	12 or 24 Vdc
Porting:	All ports G1/4
Material:	Steel / ductile iron, plated

LQTPS - Quick Hitch and Tilt Valve with pressure limiter

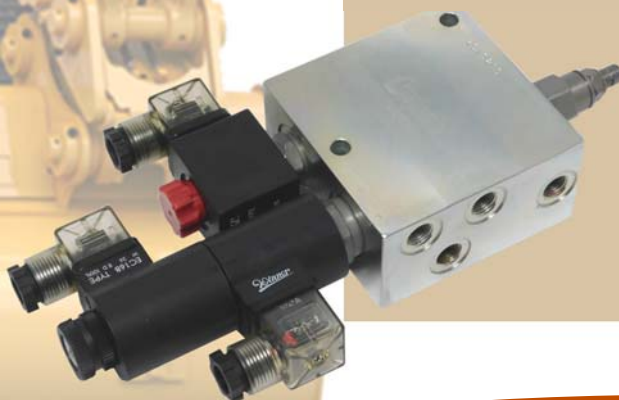

The LQTPS has dual functions of controlling a quick hitch actuator as well as a double acting tilt cylinder. It also incorporates an adjustable pressure reducing/relieving valve to limit any high pressure on the hitch actuator that may exceed its pressure rating.

Specifications

Max pressure:	350 bar, Red/Relieving 50-315 bar
Max flow:	20 l/min
Voltage:	12 or 24 Vdc
Porting:	All ports G1/4
Material:	Steel / ductile iron, plated

Call our Sales Team on 0738813312 for pricing and detailed Specsheets on each model



More info? Go to our website
www.hyteco.com.au to see
our complete range of
Standard Products.

Hyteco (Aust) Pty Ltd
59 Kremzow Rd Brendale Qld 4500
phone: 07 3881 3312 fax: 07 3881 3314
email: sales@hyteco.com.au web: www.hyteco.com.au