




HIGH-TECH CETOP SOLENOID VALVES

The Hyteco range of High-Tech Cetop Solenoid Valves are manufactured to the ISO 9001 International Quality Management system.

These valves offer very good value, as a lower cost alternative to the more expensive brands, and function to the same standard in a wide range of industry applications.

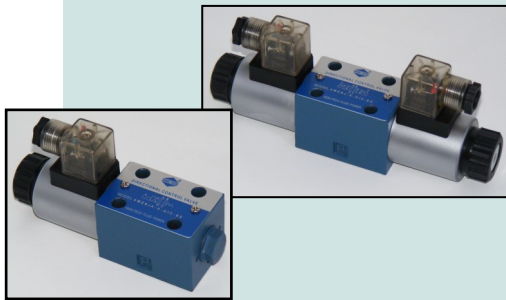

Cetop 3 - 4WE6


Features:

- Maximum Pressure rated to 350 Bar
- Maximum Pressure on T-Port 210 Bar
- Maximum Flow up to 80 LPM
- Available in 12 & 24VDC / 110 & 220VAC
- All common spool configurations available

Cetop 5 - 4WE10

Features:

- Maximum Pressure rated to 350 Bar
- Maximum Pressure on T-Port 210 Bar
- Maximum Flow up to 120 LPM
- Available in 12, 24VDC / 110, 220VAC
- All common spool configurations available

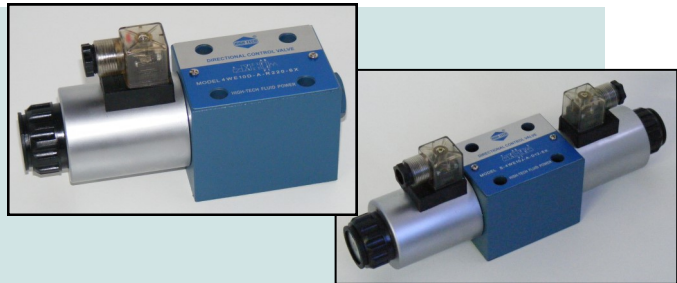

Cetop 7- 4WEH16 - Slave and Master

Features:

- Maximum Pressure rated to 280 Bar
- Maximum Pressure on T-Port 210 Bar
- Maximum Flow up to 300 LPM
- All common spool configurations available
- Internally and externally drained Pilot supply

Note: Main Slave valve, requires a Master Solenoid valve on top



Cetop 8 - 4WEH25 - Slave and Master

Features:

- Maximum Pressure rated to 280 Bar
- Maximum Pressure on T-Port 210 Bar
- Maximum Flow up to 600 LPM
- All common spool configurations available
- Internally and externally drained Pilot supply

Note: Main Slave valve, requires a Master Solenoid valve on top



Contact Hyteco for Technical Data Sheets on these valves which provide full detailed specifications



More info? Go to our website
www.hyteco.com.au to see
 our complete range of
 Standard Products.

Hyteco (Aust) Pty Ltd
 59 Kremzow Rd Brendale Qld 4500
 phone: 07 3881 3312 fax: 07 3881 3314
 email: sales@hyteco.com.au web: www.hyteco.com.au